

**Features :**

- Robust .865" Square Package
- Strong Electron Welded PC Terminations
- Dual and Tri-Concentric Shaft Option
- Enclosed High Temperature Design
- Push Button Feature Option
- Precious Metal Contacts
- Contacts Insert Molded

**Benefits :**

- Compact Size
- Easy Insertion into PCB
- Multiple Functions Save Panel Space
- Wave Solder Applications
- Addition of Push button allows Scroll and Select Function
- Long Service Life of over 50,000 cycles with Low Contact Resistance
- Maximum Switch Position Accuracy

## MM Series Applications

**Avionics:**

- Radio Channel Select
- Auto Pilot Select
- Fuel / Air data systems
- Flight Simulators

**Communication Equipment:**

- GPS—Co-ordinates Input
- Military and Commercial Radio Channel Select

**Medical:**

- Defibrillators — Voltage Control
- X-Ray Equipment—Intensity Input

**Construction / Agricultural Equipment**

- Combine Platform Height Select
- HVAC Cab Controls

**Test Equipment**

- Oscilloscopes—Scale Input Control



**Front facing PC terminals option**

## Electroswitch MM Series


**Dual Concentric with optional Pushbutton**





The MM Series represents the best in contemporary rotary technology and reflects the high standards of reliability that have made Electroswitch rotary devices known worldwide. At only .86" square, these compact switches have up to 36 positions and adapt to numerous design requirements.

Durable construction and an enclosed, high temperature resistant design make the MM Series ideal for wave solder applications. Contacts are insert molded in place for lifetime performance and switching accuracy.



Available options include concentric shafts as well as shaft and panel seals. These switches are highly versatile and economically customized. These options help make the MM Series a cost effective solution for a wide range of applications.




Parallel Shaft Mounting (relative to PC Board)

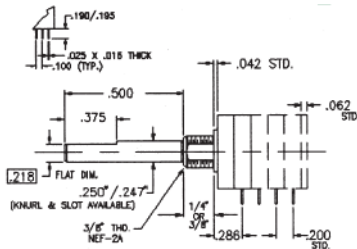

Perpendicular Shaft Mounting (relative to PC Board)

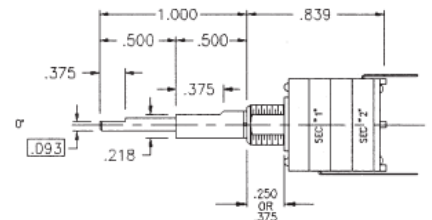

Perpendicular Shaft Mounting (relative to PC Board)

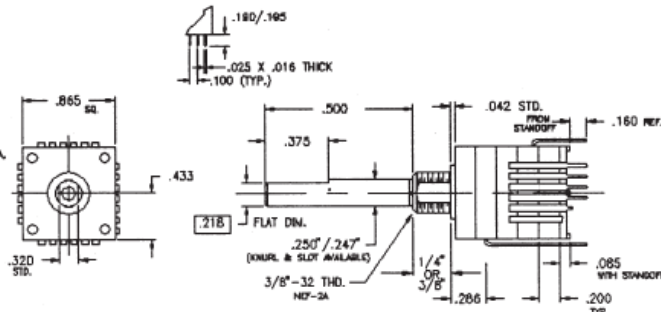

Shaft and Bushing Options			
Suffix	Shaft Diam	Shaft Lgh. From End of Bushing	Bush Lgh
01	.125"	.375"	.250"
02	.125"	.375"	.375"
03	.125"	.500"	.250"
04	.125"	.500"	.375"
05	.125"	.750"	.250"
06	.125"	.750"	.375"
07	.125"	1.00"	.250"
08	.125"	1.00"	.375"
09	.250"	.375"	.250"
10	.250"	.375"	.375"
11	.250"	.500"	.250"
12	.250"	.500"	.375"
13	.250"	.750"	.250"
14	.250"	.750"	.375"
15	.250"	1.00"	.250"
16	.250"	1.00"	.375"

### Ordering Information

MM	—								
Number of Decks	Number of Positions	Code Output: G = Gray Q = Quadrature H = Hexidecimal * B = BCD * * = optional	Termination: F = Front PC R = Rear PC P = Perpendicular PC L = Solder Lug	Index Angle: 90°, 60°, 45° 36°, 30° 22.5°, 20° 18°, 15° 12.8°, 11.25° 10°	Stop Type: F = Fixed C = Continuous	Sealing: S = Standard (No Seals) P = Shaft and Panel	See chart Above for Suffix	Consult Factory for Additional Available Options	

## Electrical / Mechanical Specifications

### Electrical Specifications

Current Carrying Capacity: Resistive Load 250 mA at 28 VDC  
Switching Loads 1.5 mA at 115VAC  
150 mA at 14 VDC

Contact Design: Shorting or Non-shorting (non-shorting version up to 16 positions only)

Dielectric Strength: From pole to shaft 1,000 volts minimum

Contact Resistance: 75 milliohms maximum over lifetime.

Codes: Gray, Quadrature, BCD and Hexidecimal  
Others available for special order

### Environmental Specifications

Operation Temperature: -55°C to +85°C (105°C optional)

Shock / Humidity: MIL STD 202E Method

### Mechanical Specifications

Operational Forces: (Torque over detents): 7 to 20in/oz. ±25%

Stop Strength: 15 in/lb. minimum

Sealing: Terminals are insert molded into housing. Front and rear molded sections of module are Interlock construction and ideally suited for wave soldering.

Anti-Rotation Device: Flatted bushing .375" dia. X .320", double "D"

Concentric Shafts: Available

Life: 50,000 minimum cycles at rated load

Detent Angles: 90°, 60°, 45°, 36°, 30°, 22.5°, 20°, 18°, 15°  
12.8°, 11.25° 10°

### Materials (RoHS Compliant)

Shaft and Hardware: Shafts and Hardware are steel, zinc and chromate treated.

Molded Construction: Molded parts are Ryton R4 and Polyester PBT, chosen for heat resistance and electrical characteristics. Rated UL 94 V-O or better

Disc Construction: Program Disc is glass epoxy, copper clad with silver plating standard. Gold upon request.

Contacts: Phosphor-bronze with silver inlay at interface with program disc. Gold inlays available upon request. External terminals are tin plated except on die cut edges.

