


Presslites Snap-In Switches

INDICATOR LIGHTS



.5 Amp Momentary Action Switch and Matching Indicator

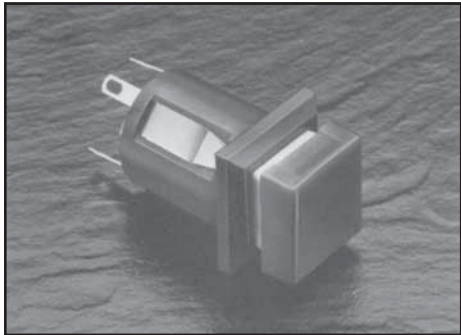

Switch Characteristics

Contact rating: .5 amp resistive at 30 VDC. .1 amp resistive at 115 VAC.

Nominal pushbutton travel: .1 in.

Nominal operating force: 4 oz.

Material and Finishes

Pushbuttons: high impact plastic per L-P-349.

Housing: black thermoplastic.

Mounting clip: stainless steel.

Lamp terminals: beryllium copper, tin plated.

Switch terminals and contacts: brass, gold plated.

Lamp

T-1 3/4 incandescent, with midjet flange base. See Lamp Selection Guide. Lamp remains stationary when pushbutton is depressed.

Mounting

Assemblies press fit into .687 in. ± 005 in. dia. holes from front of panel. Mounting clips accommodate panels from .063 in. to .188 in.

Weight


Approximately .25 oz.

Solder Terminals


Terminals accept AMP FASTON No.60415-1 receptacles or equivalent.

Type 591 Switch


Printed Circuit Terminals Type 591

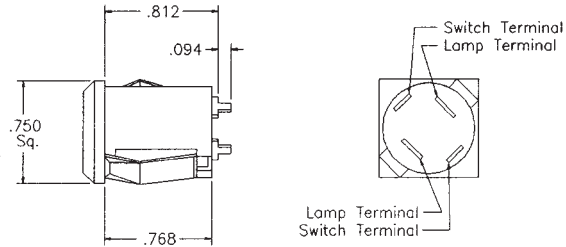

Schematics



5/16 in. Square Low Profile Pushbutton

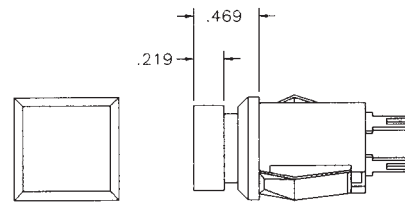

3/4 in. Square Pushbutton

